




NBF 213925



DISTANCE:	39 FEET	VOLUME:	24.5 mL
RATIO:	2.14:1	FORWARD:	17.75 mL
DROP BRUSH:	38 FEET	REVERSE:	6.75 mL
TANKS:	A & B	PUMP:	50μL

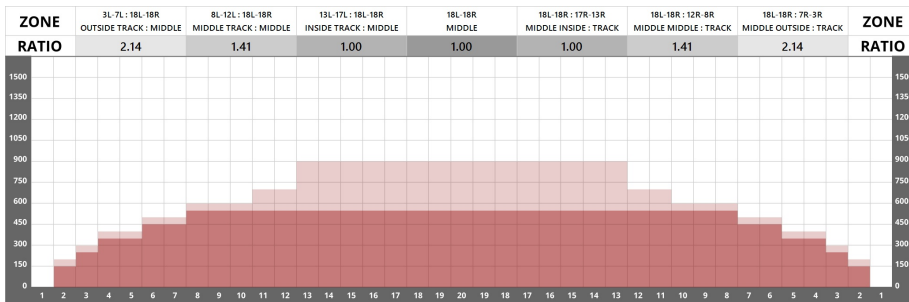

FORWARD LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	3	50	14	3	A - A	0 → 4	5,550
2	3L	3R	2	50	18	3	B - B	4 → 9	3,500
3	4L	4R	2	50	18	3	B - B	9 → 14	3,300
4	6L	6R	2	50	22	3	B - B	14 → 20	2,900
5	8L	8R	2	50	26	3	B - B	20 → 27	2,500
6	2L	2R	0	50	26	3	B - B	27 → 39	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	50	30	3	B - B	38 → 26	0
2	13L	13R	4	50	22	3	B - B	26 → 14	3,000
3	11L	11R	2	50	26	3	B - B	14 → 6	1,900
4	2L	2R	1	50	22	3	A - A	6 → 3	1,850
5	2L	2R	0	50	14	4	A - A	3 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

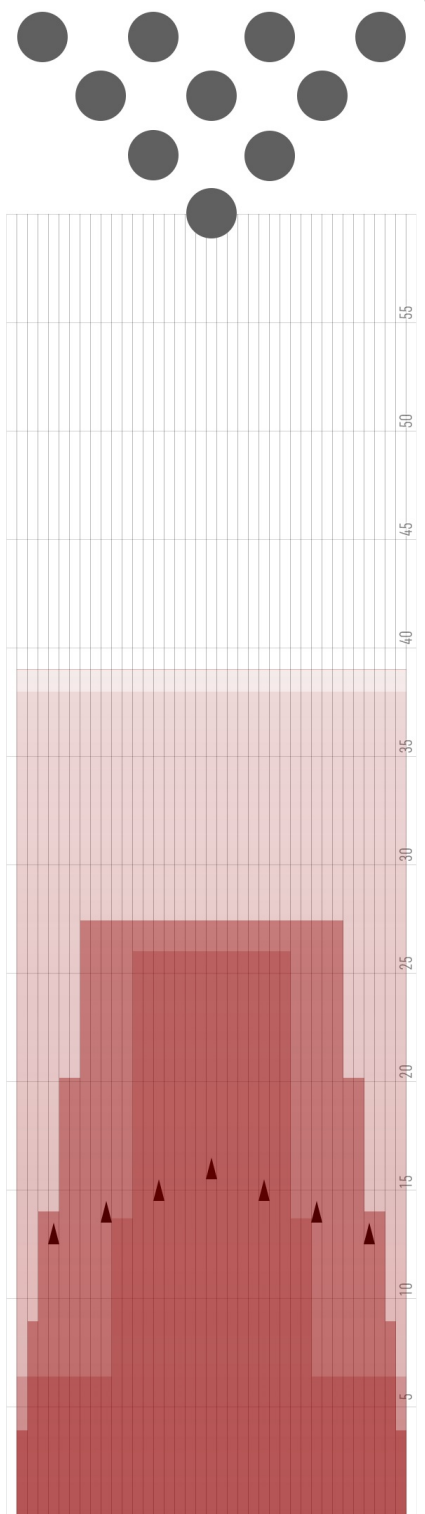

KEGEL PATTERN LIBRARY APP



[PATTERNLIBRARY.KEGEL.NET](https://patternlibrary.kegel.net)



SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

